



City of Placerville

Engineering Department
3101 Center Street, Placerville, CA 95667
(530) 642-5250

ADDENDUM NUMBER 1

Dated: April 15, 2025

to the
**Notice to Bidders, Special Provision, Proposal and Contract Documents
for Construction of**

**THOMPSON WAY REPAVING PROJECT – PHASE 1
PROJECT NO. 42206/42208
City of Placerville**

Bids Due: Thursday, April 17, 2025; 2:00 p.m.

This Addendum is issued to the Thompson Way Repaving Project – Phase 1. Submit proposals for this work with the understanding and full consideration of this Addendum. The revisions declared in this Addendum are essential parts of the Contract.

Bidders are also directed to sign this Addendum as acknowledged, and attach the complete, signed Addendum to the Proposal.

The following responses to questions asked to date:

Question No. 1: Thompson Way - Bid Item 8 "SEWER SERVICE CONNECTION" - Does this item include both new and reconnection of existing sewer service connections? Please see attached plan sheet markups of C06 and C07. Referencing sewer notes there is 1EA of note 6 and 6EA of note 7. This would combine to equal a total of 7EA of sewer service connections for Thompson Way which is 1 more than the 6 listed.

Answer: Change bid item 8 quantity from 6 to 7.

Question No. 2: Thompson Way - Bid Item 10 "SEWER CLEAN-OUT"- Does the 2-way cleanout shown on plan sheet C07 represent the 2EA sewer cleanouts shown on the bid items for Thompson Way? Please see attached plan sheet.

Answer: Change bid item 10 quantity from 3 to 2.

Question No. 3: **Sherman Street - Bid Item 8 "SEWER SERVICE CONNECTION"** - Does this item include both new and reconnection of existing sewer service connections? Please see attached plan sheet markup of C08. Referencing sewer notes there is 1EA of note 6 and 3EA of note 7. This would combine to a total of 4EA of sewer service connections matching the total of 4 listed under the bid item.

Answer: This is correct – 4 each.

Question No. 4: **Sherman Street - Bid Item 16 "REMOVE 8-INCH SD PIPE"** - Does this item include quantity from both storm drain notes 10 and 12? Note 10 does not have a specified quantity and note 12 has 34LF of removal noted. Bid item 16 only has 8 LF listed for the item.

Answer: Bid item 16 only included the removal of the section of storm drain pipe that will conflict with the new 6-inch sewer main. It did not include the R&R from Note 12. Change bid item 16 quantity from 8 to 42.

Question No. 5: There are two lists on Public Purchase. One labelled “Plan Holders” and the other labeled “Contractors”. Which list is the official list?

Answer: Bidders must be on the Public Purchase “Plan Holders” list to bid on the project.

Question No. 6: Is there a staging area being provided by the City?

Answer: No staging area will be provided by the City for this project.

The following changes are made to the project plans, Notice to Bidders, Special Provisions, Proposal, and contract as part of this addendum:

Item No. 1: Additional Construction Requirement

All new sewer and storm drain pipes crossing water mains shall have pipes centered at the crossing so that joints will be placed as far from the water main as possible.

Item No. 2: Revise the following quantities on bid forms:

Thompson Way Bid Item 8: Change Quantity to 7.
Thompson Way Bid Item 10: Change Quantity to 2.
Sherman Street Bid Item 16: Change Quantity to 42.

Item No. 3: Revise Storm Drain Profile

Replace profile on Sheet C08 with the attached Turner Street Storm Drain Profile View.

Item No. 4: Delete T-cut Requirement

The plans and specs require a T-cut, but **the T-cut is being deleted from the project. No T-cut will be required.** Project area roads will be fully repaved next summer so only trench AC restoration will be required.

Attachments:
Turner Street Storm Drain Profile Exhibit

This addendum has been prepared under the direction of the following registered Civil Engineer:



ACSchiestel

A. Cory Schiestel, P.E.

4/15/2025
Date


Acknowledgment:

I have reviewed the materials included in Addendum 1 to the Thompson Way Repaving Project – Phase 1 and understand the information provided is included as part of the Special Provisions, Proposal and Contract.

By: _____
Bidder's Signature Date

Bidder's Name (printed)

Name of Company

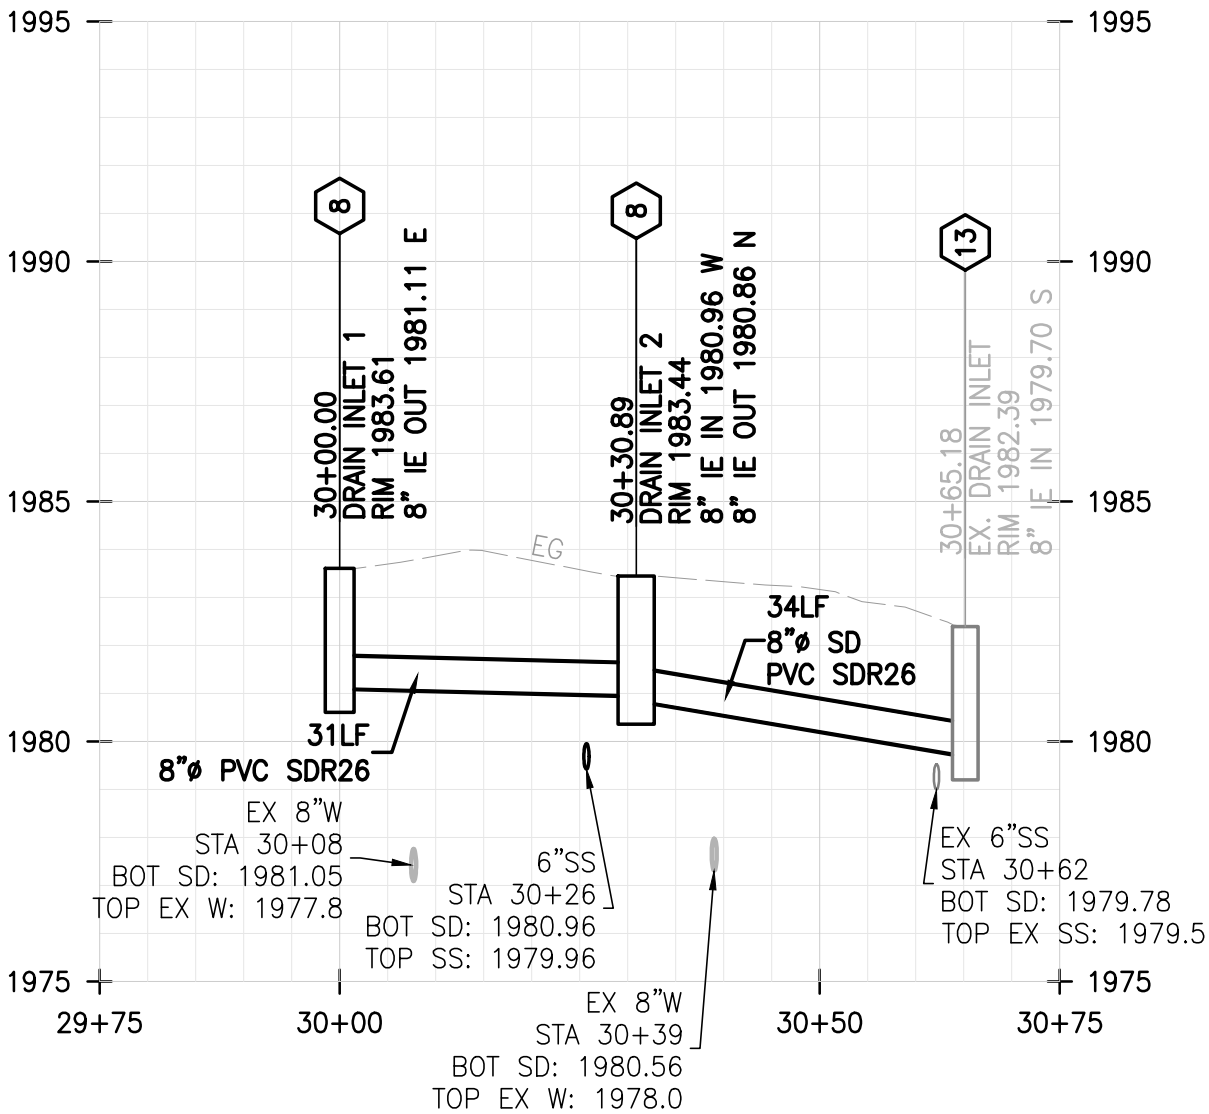

TURNER STREET STORM DRAIN PROFILE VIEW

SCALE: HORIZ. 1"=20'
 VERT. 1"=4'

ADDENDUM 1

ADDED PIPE CROSSINGS



2525 EAST BIDWELL STREET
 FOLSOM, CA 95630
 916-638-8200
 rickengineering.com

